


12VDC Class 2 Plug-in Power Supplies

Inspired LED

Inspired LED's 12VDC Class 2 Plug-in Power Supplies are a simple, hassle-free way to power low voltage LED's. Featuring our standard 3.5mm x 1.3mm output plugs, these power supplies combine easily with inspired LED products to create the perfect plug-and-play LED system for your home or business!




2 AMP (SKU #3452)

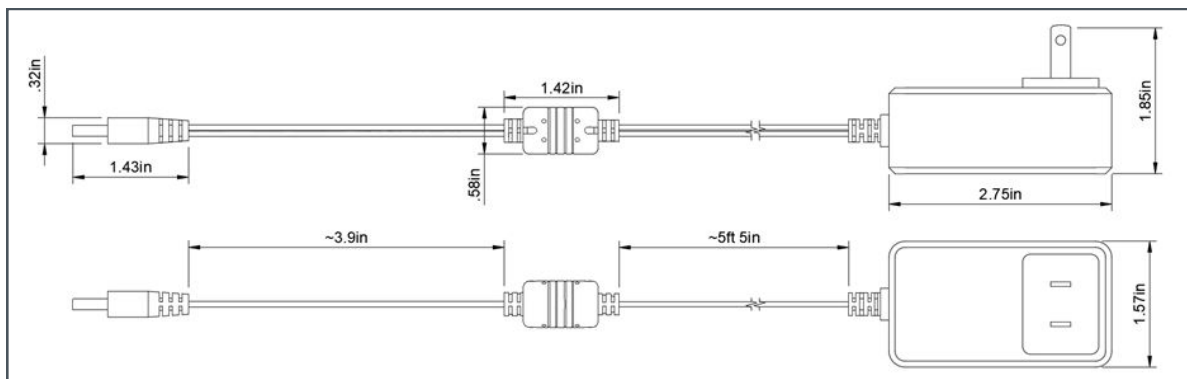

Specifications:

- Class 2, Level VI, UL Listed E584317
- Dimensions: 2.75" (L) x 1.57" (W) x 1.28" (D)
- Standard Cable Length: 72"
 - In-Line Ferrite Bead Diameter: 0.6"
- Input: 100-240 VAC, 50/60HZ, 0.8 AMP
- Output: 12VDC, 2 AMP
- DC Plug Size: 3.5mm x 1.3mm
- Polarity: (+) indicated by white blocks
- Warranty: 2-Year Limited Warranty

5 AMP (SKU #3753)

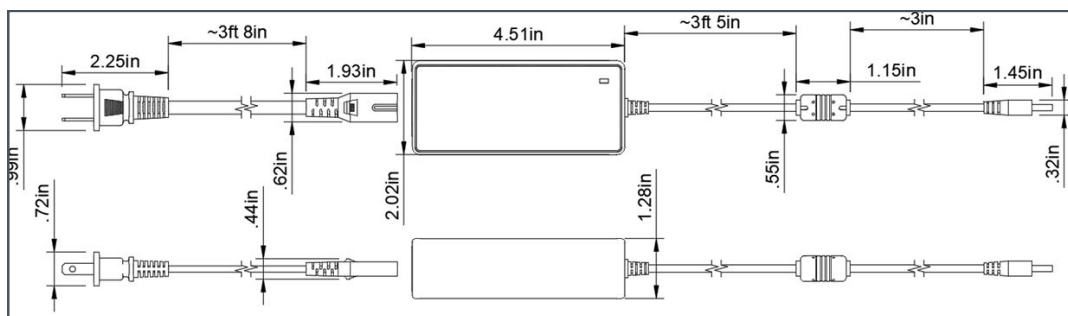

Specifications:

- Class 2, Level VI, UL Listed E479306
- Dimensions: 4.5" (L) x 2.02" (W) x 1.28" (D)
- Overall Standard Cable Length: 91.8"
 - AC Input Cable: 44"
 - Output Cable: 45.5"
 - In-Line Ferrite Bead Diameter: 0.6"
- Input: 100-240 VAC, 50/60HZ, 2 AMP
- Output: 12VDC, 5 AMP
- DC Plug Size: 3.5mm x 1.3mm
- Polarity: (+) indicated by red wire
- Warranty: 2-Year Limited Warranty

Power Requirements:

Power Source	Maximum Length of Flex Strip Lighting						Max # Pro Series Panels		Max # Designer Panels	
	Normal Bright	Super Bright	Ultra Bright	Mega Bright	COB	Double Row UB	21-LED	42-LED	10"	18"
2 AMP Plug-In Power Supply (24W)	312" (19.5W)	156" (19.5W)	85" (19.5W)	78" (19.5W)	65" (19.5W)	45" (19.5W)	12	6	12	6
5 AMP Plug-In Power Supply (60W)	768" (48W)	384" (48W)	210" (48W)	192" (48W)	160" (48W)	109" (48W)	32	16	32	16