

# Inspired LED 200W Decora Style Dimmer

High-Voltage Single Pole & 3-Way Dimmer Switch

Inspired LED

SKU: 8631



Inspired LED now has its own phase cut dimmer switch for dimmable hardwired transformers. Ideally suited for leading edge compatible transformers and drivers. Single Pole or 3-Way compatible with a max load of 200W for LED installations. Voltage adjustment wheel for Trim setting, find the ideal dim range. Works with standard Lutron/Decora style faceplates.

## Product Features:


- Compatible with most hardwired dimmable transformers (phase-cut leading edge)
- Single Pole & 3-Way Compatible
- Available in White only
- Fine-Tune dim range with voltage adjustment wheel
- Compatible with standard Lutron/Decora Style faceplates

## Specifications:


- Max Load 200W for LED
- Min Load 3W for LED
- Rated Voltage: 120VAC/ 60Hz
- Phase Cut (Leading Edge)
- Single Pole or 3-Way
- Size: 4.13in x 1.73in x 1.26in (LxWxH)
- Safety Standards: ETL Listed

## Installation Diagram:

### Single-Pole Wiring

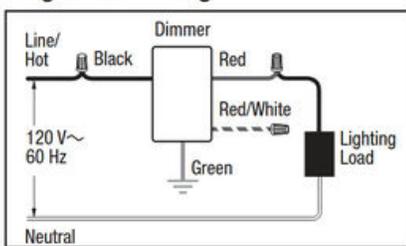

### 3-Way Wiring

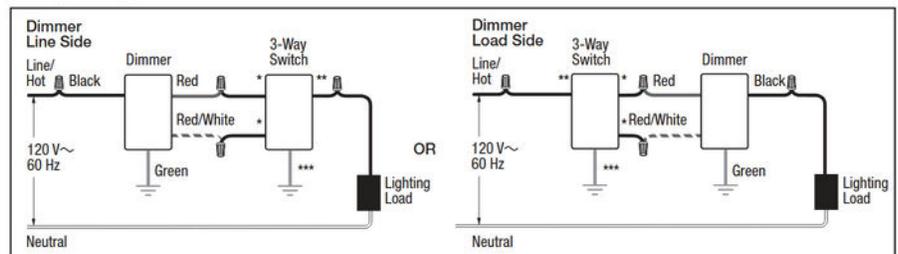

## Adjusting the Dimmer Trim Setting:

1. If your lights are flickering, the dimmer trim setting may need to be adjusted.
2. With the lights installed and the system powered on, remove the dimmer faceplate.
3. Locate the trim adjustment wheel on the bottom left of the dimmer.
4. Turn the trim wheel counterclockwise to the lowest setting until the lights are faint or completely off and no flicker is present.
5. Slowly turn the trim wheel clockwise until you reach your desired brightness level without any noticeable flicker.
6. Turn the lighting system off and back on to confirm the flicker has been eliminated.