


inspired LED

Tiger Paw[®] Flex Extender

Inspired LED's patented solderless **Tiger Paw[®] Connectors** are the perfect solution for in-field LED system design and customization. These innovative accessories pair with LED flex strips for quick, convenient installation. Now, creating the perfect low-voltage lighting system is easier than ever, thanks to Inspired LED!

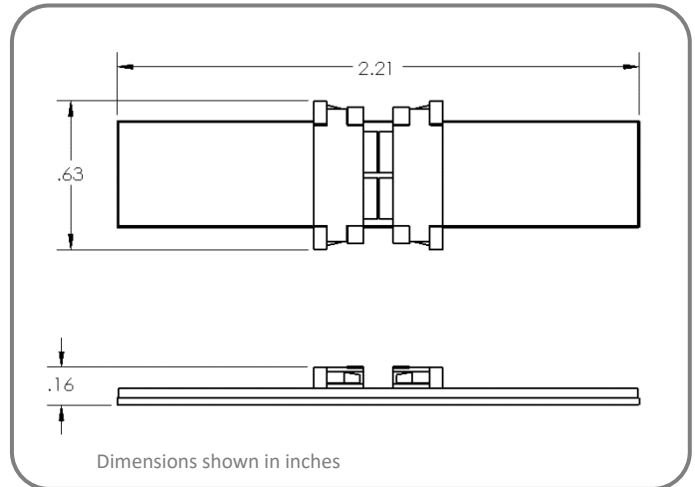


Product Specifications: SKU# 3498


- Solderless termination for 8-10mm LED flex strips (end to end)
- Max Load- 5 AMPs
- Net Weight- 3g
- VHB adhesive backing included
- Industry proven locking system meets shock and vibration requirements for IEC 60068-2-27
- U.S. Patent No. 8,714,772

Instructions:


1 Use scissors to cut LED strips to length along copper solder pads ONLY (located every 3 LEDs).



2 Take hold of black sliding latch and pull outward to open.




3 Peel back adhesive lining on LED strip about 1/2 inch.




4 Insert flex strip into the gap between black sliding latch and beige bridge piece.



5 Repeat steps three through five to insert flex on opposite.



6 Ensure that polarities are matched from strip to strip by identifying (+/-) signs marked along the flex.



7 LED strips should be centered and fully inserted before sliding black latches firmly closed.



8 Provide power to the end of strip using Class 2 DC power supply. Verify all connections before install.



Troubleshooting: If LEDs are flickering, double check connection to be sure flex is fully inserted and secured, if no lights turn on check to be sure polarities are properly matched.



inspiredled.com



orders@inspiredled.com



(480) 941-4286